

Pamir-X Line

X Band SSPA BUC - GaN Technology

Overview

The Pamir-X Line are hub-mount up-converter transmitters using GaN Technology, operating in X-Band. Weighing less than 8 lbs., makes it ideal for feed mounting.


- X-Band: 40W / 50W / 60W / 80W / 100W



With AC module

Features

- Extremely compact size
- Available in AC or DC
- Up to 100W of RF Output Power
- Up to 50W of Linear Power
- Built-in monitoring of critical parameters such as: RF power detection, mute control, over temperature shutdown, summary alarm
- IP67 rated housing and fan (weather proof construction)
- M&C Interfaces included: RS485, RS232, Ethernet and dry-contacts
- WEB interface and SNMP monitoring
- Optional 1:1 and 1:2 built into the BUC eliminating external controller
- Other frequency ranges available
- Optional Remote control unit

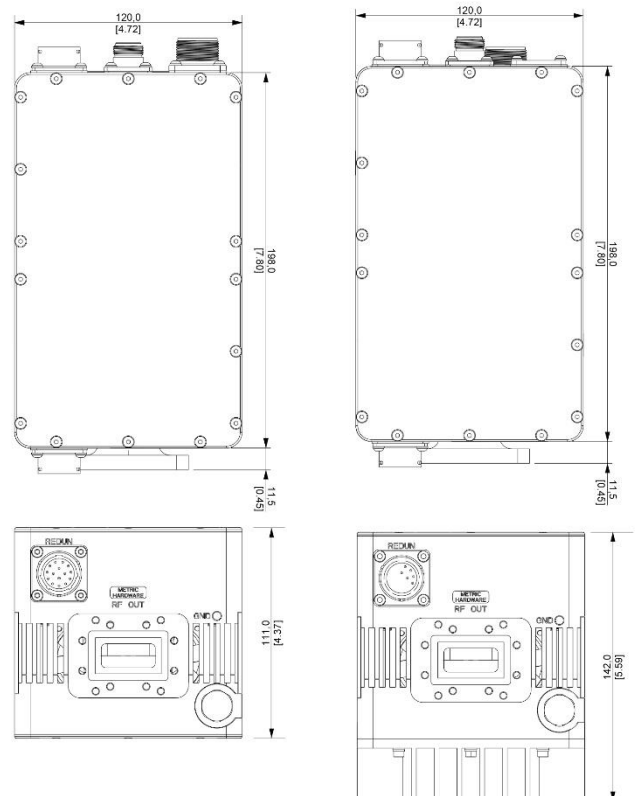

With AC module



Pamir-X Line SSPA BUC- GaN Technology

Technical Specifications					
X-Band					
Electrical Characteristics	40W	50W	60W	80W	100W
RF Output at P Sat	46 dBm	47 dBm	48 dBm	49 dBm	50 dBm
RF Output at P Lin	43 dBm	44 dBm	45 dBm	46 dBm	47 dBm
Output Frequency Range	7.9 – 8.4 GHz				
Input Frequency Range	950 – 1450 MHz				
Local Oscillator Frequency	6.95 GHz				
Gain Stability Over Temp.	± 2.0 dB max				
Gain Variation at fixed temp	± 2.0 dB over full band; ± 0.5 dB over 40 MHz				
Linear Gain	60 dB nominal				
Gain Control	20 dB nominal in 0.5 dB steps				
Output VSWR	1.50:1				
Spectral Re-growth	-30dBc @PLinear				
Third order IMD (2 equal tones 5MHz apart)	-25 dBc, with 2 equal carriers (5MHz spacing) at 3dB total power back off from rated power (P Sat -3dB)				
10MHz Reference	0 dBm ± 5.0 dB				
	@ 100 Hz	@ 1 KHz	@ 10 KHz	@ 100 KHz	@ 1 MHz
10 MHz Phase Noise Requirement	-130 dBc/Hz max	-140 dBc/Hz max	-150 dBc/Hz max	-155 dBc/Hz max	
Local Oscillator Phase Noise	-63 dBc/Hz max	-73 dBc/Hz max	-83 dBc/Hz max	-93 dBc/Hz max	-103 dBc/Hz max
Output Spurious	-60dBc max@PLinear				
Harmonics	-60dBc max @PLinear				
AM/PM	< 2deg/dB at PLin				
Input Impedance	50 Ohms				
Input VSWR	1.50:1				
Power consumption (at rated power) AC version					
	X-Band	280W	300W	320W	450W
Power requirement	120/220 AC or +36 to +72 VDC				
Interface					
Output Interface	Waveguide, CPR 112G (Grooved)				
Input Interface	N-Type Female, 50 Ohms				
Connectors	DC Connector: MS3102R14S-9P AC Connector: MS3102R14S-7P	M&C: MS3112E1419P		Redundancy: MS3112E14-15P (Optional)	
Mechanical					
Cooling	Forced Air				
Dimensions (L x W x H)	DC Model: 7.8 x 4.72 x 4.37 in (198 x 120 x 111 mm)		AC Model: 7.8 x 4.72 x 5.59 in (198 x 120 x 142 mm)		
Weight	DC Model: 8 lbs (3.65 kg)		AC Model: 9 lbs (4.1 kg)		
Environmental					
Temperature Range (ambient)		Humidity		Altitude	
40°C to + 55°C (operating) -40°C to + 75°C (storage)		0 to 100% (condensing)		10,000 ft ASL	

Ref.: PB-AWT-PMLg-X-19289-1

NORTH AMERICA

USA
info.usa@advantechwireless.com

CANADA
Info.canada@advantechwireless.com

EUROPE

UNITED KINGDOM
info.uk@advantechwireless.com

RUSSIA & CIS
info.russia@advantechwireless.com

SOUTH AMERICA

info.latam@advantechwireless.com

BRAZIL
info.brazil@advantechwireless.com

ASIA

info.asia@advantechwireless.com

INDIA
info.india@advantechwireless.com