


SapphireBlu-Series GaN 1000W Ku-Band BUC/SSPB/SSPA

With more linear power and higher MTBF than a 1250W TWTA

SSPA AWMg-K
Ext. Ku-Band SSPA
SSPB (BUC) SSPBMg-K

5200-SapphireBlu™ series
AWMg-1000KX
5200-SapphireBlu™ series

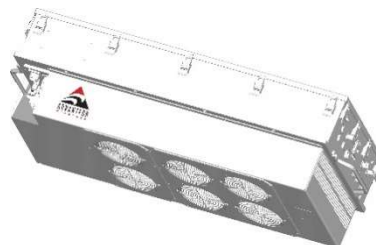

1:2 Redundant Version

Overview




The SapphireBlu-Series GaN SSPA/BUC from Advantech Wireless Technologies is a high Performance GaN Technology based SSPA designed for Multi Carrier Operations in an outdoor design concept.

With High Reliability, High Linearity, and Low Energy Consumption these systems provide high power density in a compact, rugged, weatherproof package.

The Ultimate Solution for Direct to Home TV

Features

- Save 8 to 10 dB power compared to Indoor Klystron
- Save in Energy Cost, Satellite Bandwidth, CAPEX
- Can cover multiple transponders, full DVB-S2 enabled
- Rugged, Weatherproof Outdoor Package
- MIL-STD-188-164A Compliant
- Redundant Ready, Power Expandable to 2-5 kW by phase combining
- 2 years warranty, due to increased GaN Technology reliability
- Backed by over 25 years of Outdoor SSPA design and manufacturing
- Exceeds all barriers between Klystrons, TWTs and SSPAs
- We can now saturate all transponders of an entire satellite and obtain maximum bandwidth/power efficiency (using modular RF concept)

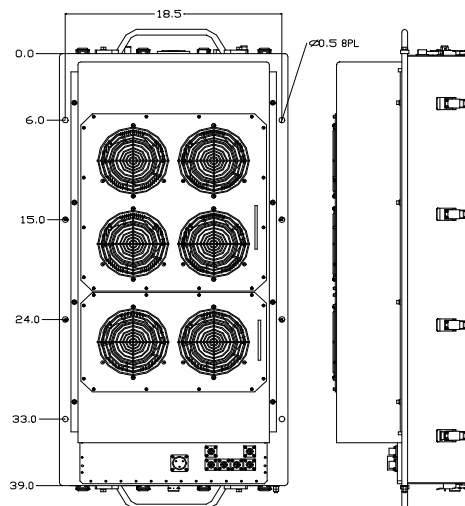

SapphireBlu-Series GaN 1000W Ku-Band BUC/SSPB/SSPA
With more linear power and higher MTBF than a 1250W TWTA

1000W Ku-Band BUC/SSPB/SSPA SapphireBlu-Series GaN				
General Specifications				
KS /KX				
Operating Frequency	14.0 – 14.5 GHz (KS)		13.75 – 14.5 GHz (KX)	
L-Band input (BUC)	950 – 1450 MHz (KS)		950 – 1700 MHz (KX)	
Output Power	1000W			
P _{SAT}	+60 dBm typ.			
P _{LINEAR}	+56.5 dBm minimum			
P _{LINEAR} is the power at which the IMD=-25 dBc for two CW signals 5 MHz apart, and the spectral regrowth is <-30 dBc @ 1.0 x symbol rate for a single QPSK/OQPSK/8PSK signal.				
Gain	SSPA	+70 dB minimum		
	SSPB (BUC)	+80 dB minimum		
Gain adjustment range	20 dB in 0.1 dB steps			
Gain flatness over full band	SSPA: 2dB p-p max	SSPB (BUC): 3 dB p-p max		
Gain slope over 40 MHz	± 0.3 dB max	SSPB (BUC) ± 0.5 dB max		
Gain variation over temperature	± 1.5 dB max			
Input Impedance and VSWR	50 Ω	SSPA 1.3:1 max	SSPB (BUC) 1.4:1 max	
Output VSWR	1.3:1 max			
Noise power density	-70 dBm/Hz in Transmit Band, -145 dBm/Hz in Receive Band (10.95 GHz – 12.75 GHz)			
Spurious at P _{LINEAR}	SSPA: -65 dBc max	SSPB (BUC): -60 dBc max		
Harmonics	-50 dBc max @ P _{LINEAR}			
AM/PM conversion	<1.0°/dB P _{LINEAR}			
Third order IMD	< -25 dBc (two tones 5 MHz apart at P _{linear})			
Group delay	Linear	0.02 nsec/MHz max	Parabolic	0.003 nsec/MHz ² max
	Ripple	1 nsec p-p max		
Residual AM Noise	0 – 10 kHz	-45 dBc		
	10 kHz – 500 kHz	-20 (1.25 + log F) dBc	F = Frequency in kHz	
	500 kHz – 1 MHz	-80 dBc		
SSPB (BUC)				
Local Oscillator freq.	13.05 GHz (KS)		12.8 GHz (KX)	
Internal Reference frequency (optional)	10 MHz		Aging/day	±2 × 10 ⁻¹⁰
			Aging/year	±5 × 10 ⁻⁸
			Stability	±2 × 10 ⁻⁸ over temp range
Phase Noise	-53 dBc/Hz at 10Hz	-83 dBc/Hz at 10 kHz		
	-63 dBc/Hz at 100Hz	-93 dBc/Hz at 100 kHz		
	-73 dBc/Hz at 1000Hz			
External Reference	10 MHz			
Frequency phase noise (max)	-120 dBc/Hz at 10Hz	-155 dBc/Hz at 10 kHz		
	-135 dBc/Hz at 100Hz	-160 dBc/Hz at 100 kHz		
	-150 dBc/Hz at 1000Hz			
Weight & Dimensions				
Dimensions	L x W x H 39.00" x 18.50" x 12.10" (990 x 470 x 307 mm)			
Weight	275 lbs (125 kg)			
AC input voltage	190 – 265 VAC (47-63 Hz)			
Power consumption	3.8kW at 46 dBm	5kW at 56 dBm	6.5kW at P _{SAT}	
Interfaces	Input (RF or L-Band)	N type female	AC line	MS3102 type
	Output Sample Port	N type female	RF output	WR75 Cover
	RS232/RS485	MS3102 type	Ethernet	RJ45 (Weatherized)
Environmental	Temperature	Operating -30°C to +55 °C	Option 1	-40°C to +55 °C
		Storage -55°C to +85 °C	Option 2	-50°C to +55 °C with startup @ -40°C
	Humidity	100% condensing		
	Altitude	10,000' AMSL, derated by 2 °C/1000' from AMSL		

Ref.: PB-SAPPH-2G-Ku-1000W-22245

NORTH AMERICA

USA
info.usa@advantechwireless.com

CANADA
Info.canada@advantechwireless.com

EUROPE

UNITED KINGDOM
info.uk@advantechwireless.com

RUSSIA & CIS
info.russia@advantechwireless.com

SOUTH AMERICA

info.latam@advantechwireless.com

BRAZIL
info.brazil@advantechwireless.com

ASIA

info.asia@advantechwireless.com

INDIA
info.india@advantechwireless.com