

# GENESIS

## Ku 200W/250W/300W GaN SSPA/SSPB

### Overview


The new Genesis-Series of Ku-band SSPA/SSPBs from Advantech Wireless Technologies epitomizes the latest in hardware and software technologies, making it the most feature-rich satcom SSPA in the industry. Initially available in 200W, 250W and 300W Ku-band variants, the Genesis-Series SSPA/SSPB delivers the high-end features discriminating users have come to expect.

### Features


- 200W, 250W and 300W in a single package
- SSPA or SSPB option
- Soft-fail ready
- Internal/External reference with autosense
- Field replaceable power supply module
- Redundant ready with no external controller
- Full featured embedded web server
- Secure SNMPv3 interface
- Serial Protocol over RS232/RS485/UDP
- Discrete alarm interface
- Status LED indicator
- Forward and Reflected power monitoring
- True RMS power detection
- Calibrated Output RF sample port
- Field replaceable fan assembly
- Weatherproof construction
- 20dB gain adjustment (minimum)
- **CE** certified (EN 61000-4, EN 61000-3, EN 55011, EN 61010-1)

### Options

- 1:1, 1:2, N+1 redundant configurations
- Calibrated Input RF sample port

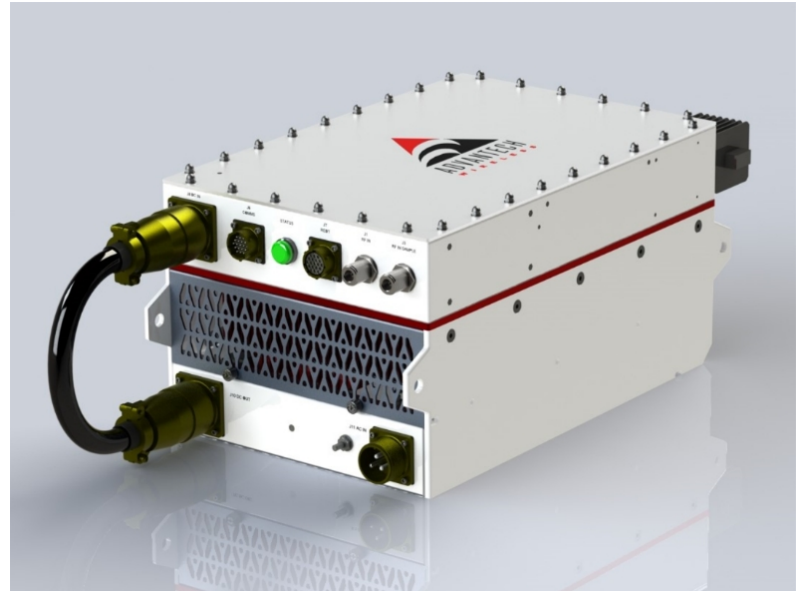

### Outline

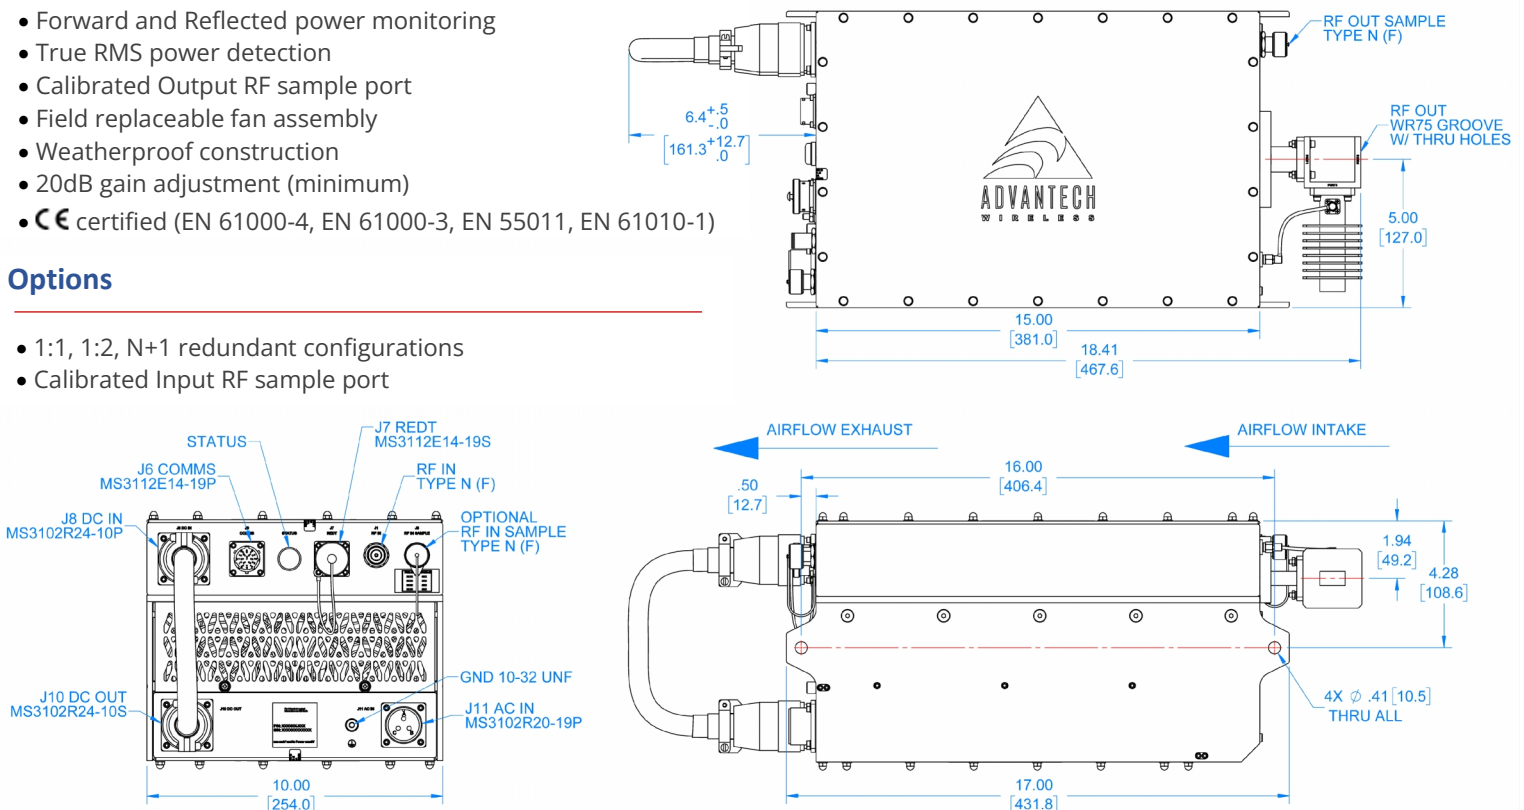

# GENESIS

## Ku 200W/250W/300W GaN SSPA/SSPB

General Specifications			
	200W	250W	300W
Operating Frequency	Standard: 14.0 – 14.5 GHz Extended: 13.75 – 14.5 GHz		
L-Band input (BUC)	Standard: 950 – 1450 MHz Extended: 950 – 1700 MHz		
Output Power $P_{LINEAR}$	+50dBm	+51dBm	+51.7 dBm
	$P_{LINEAR}$ is the power at which the IMD=-25 dBc for two CW signals 5 MHz apart and the spectral regrowth is <-30 dBc @ 1.0 x symbol rate tested with a single QPSK, 2MS/s SR, 0.35 roll-off		
Gain (with 0dB attenuation)	75 dB		
Gain adjustment range	20 dB in 0.1 dB steps		
Gain flatness over full band	SSPA: 2dB p-p max	SSPB: 4dB p-p max	
Gain slope over 40 MHz	SSPA: $\pm 0.3$ dB max	SSPB: $\pm 0.5$ dB max	
Gain variation over temperature	$\pm 1.5$ dB max		
Input Impedance and VSWR	50 $\Omega$	SSPA: 1.3:1	SSPB: 1.5:1
Output VSWR	1.3:1		
Signal Related Spurious at $P_{LINEAR1}$	SSPA: -65 dBc max	SSPB: -55 dBc max	
Harmonics	-50 dBc @ $P_{LINEAR}$		
AM/PM conversion	<1°/dB $P_{LINEAR}$		
Third order IMD (two tones)	-25 dBc two signal 5 MHz apart at $P_{LINEAR}$		
Group delay	Ripple	1 nsec p-p max over any 40 MHz band	
Local Oscillator freq.	Standard: 13.05 GHz Extended: 12.8 GHz		
Internal Reference frequency	Aging/day: $\pm 1 \times 10^{-9}$ Aging/year: $\pm 10 \times 10^{-8}$ Stability: $\pm 1 \times 10^{-7}$ over temp range		
Max Phase Noise	-37 dBc/Hz at 10Hz -67 dBc/Hz at 100Hz	-77 dBc/Hz at 1 kHz -87 dBc/Hz at 10 kHz	-97 dBc/Hz at 100 kHz -107 dBc/Hz at 1 MHz
External Reference Input Power	10 MHz -5dBm to +5dBm		
Frequency phase noise (max)	-120 dBc/Hz at 10Hz -140 dBc/Hz at 100Hz	-155 dBc/Hz at 1 kHz -160 dBc/Hz at 10 kHz	-165 dBc/Hz at 100 kHz
Dimensions	L x W x H: 18.4" x 10" x 8.1" (467x254x206 mm)		
Weight	44.5 lbs. (20 kg)		
AC input voltage	90 – 265 VAC (47-63 Hz) 0.95 Power Factor @ 220VAC		
Power consumption at $P_{Linear}$	1500W	1600W	1700W
Interfaces	Input (RF or L-Band): N type female Output Sample Port: N type female Interface Port: MS3112 type (See outline for details)	AC line: MS3102 type (See outline for details) RF output: WR75 Cover with Groove	
Environmental	IP65 compliance Temperature: Operating: -40°C to +55 °C Storage: -55°C to +85 °C Humidity: 100% condensing Altitude: 10,000' AMSL, de-rated by 2 °C/1000' from AMSL		

### NORTH AMERICA

**USA**  
info.usa@advantechwireless.com

**CANADA**  
Info.canada@advantechwireless.com

### EUROPE

**UNITED KINGDOM**  
info.uk@advantechwireless.com

### SOUTH AMERICA

info.latam@advantechwireless.com

**BRAZIL**  
info.brazil@advantechwireless.com

### ASIA

info.asia@advantechwireless.com

**INDIA**  
info.india@advantechwireless.com