

## 800W S-Band Hubmount SSPA Advanced Solid State Technology

### Taurus Line SSPA AWMAg-800S


#### Solid State Technology for Satellite TT&C and Deep Space Communication

- Covers S band, from 2.025-2.120 GHz
- Rugged, Weatherproof Outdoor Package
- High Reliability, and Availability
- High power density in a compact, rugged, weatherproof package
- Designed for Multi Carrier Operations
- Backed by over 25 years of Outdoor SSPA design and manufacturing



### Options

- 1:1 and 1:2 Redundancy Systems with different choices for the mount.

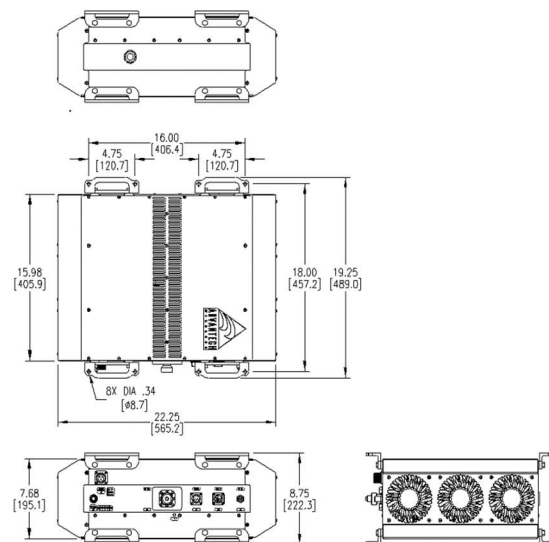

## 800W S-Band Hubmount SSPA Advanced Solid State Technology

Specifications	S-band	
Operating Frequency	2.025 – 2.120 GHz	
Saturated Output Power	800W	
P <sub>SAT</sub> , at Flange	+59.0dBm nominal*	
P <sub>LINEAR</sub>	+56.0dBm minimum	
	Spectrum Regrowth ≤ 25dBc at 1.0 Symbol Rate, QPSK, α=0.35	
Gain	SSPA	70.0dB Min
Gain adjustment range	20 dB in 0.1 dB steps	
Gain flatness over full band	2 dB p-p max	
Gain slope over 10 MHz	0.6 dB max	
Gain variation over temperature	± 1.5 dB max	
Input Impedance and VSWR	50 Ω	1.5:1
Output VSWR	1.3:1	
Noise power density	-75dBm/Hz	
Spurious at P <sub>LINEAR</sub>	-60 dBc max	
Harmonics	-60 dBc @ P <sub>LINEAR</sub>	
AM/PM conversion	<1.0°/dB P <sub>LINEAR</sub>	
Third order IMD (two tones)	-25 dBc two signals 5 MHz at Plin	
Group delay	Ripple	1 nsec p-p max over any 10 MHz band
Residual Phase Noise, Continuous	-60 dBc/Hz at 10Hz	-115 dBc/Hz at 100 KHz
	-90 dBc/Hz at 100Hz	-125 dBc/Hz at 1 MHz
	-100 dBc/Hz at 1000Hz	-130 dBc/Hz at 10 MHz
	-110 dBc/Hz at 10 kHz	-130 dBc/Hz at 100 MHz
Weight & Dimensions		
Dimensions	22.25" x 16.0" x 7.68" (565.2mm x 406.4mm x 195.1mm)	
Weight	90 lbs. (40.8kg)	
AC input voltage	190 - 265 VAC, (47-63 Hz )	
Power consumption	2500 kVA max.	
Interfaces	Input - N-type female Output Sample Port - N type female RS485/Ethernet - MS3112 type	AC line - MS3102 type RF output - DIN 7/16
Environmental	Operating Temp.	-30°C to +55 °C      Option 1 -40°C to +55 °C
	Storage	-55°C to +85 °C
	Humidity	100% condensing
	Altitude	10,000' AMSL, derated by 2 °C/1000' from AMSL

\*P<sub>sat</sub> will be limited to +57.0 dBm

Ref.: PB-DB-S-800W-25009

### NORTH AMERICA

**USA**  
info.usa@advantechwireless.com

**CANADA**  
Info.canada@advantechwireless.com

### EUROPE

**UNITED KINGDOM**  
info.uk@advantechwireless.com

### SOUTH AMERICA

info.latam@advantechwireless.com

**BRAZIL**  
info.brazil@advantechwireless.com

### ASIA

info.asia@advantechwireless.com

**INDIA**  
info.india@advantechwireless.com