

150W/200W/250W/300W Ku-Band GaN SSPA/SSPB

The new **Genesis-Series** of Ku-band SSPA/SSPBs from Advantech Wireless Technologies epitomizes the latest in hardware and software technologies, making it the most feature-rich satcom SSPA in the industry. Available in 150W, 200W, 250W and 300W Ku-band variants, the Genesis-Series SSPA/SSPB delivers the high-end features discriminating users have come to expect.





300W Ku-Band SSPB

Features

- 150W, 200W, 250W, 300W in a single package
- SSPA or SSPB option
- Soft-fail ready
- Internal/External reference with autosense
- Field replaceable power supply module
- Redundant ready with no external controller
- Full featured embedded web server
- Secure SNMPv3 interface (10/100 Ethernet)
- Serial Protocol over RS232/RS485/UDP
- Discrete alarm interface
- Status LED indicator
- Forward and Reflected power monitoring
- True RMS power detection
- Calibrated Output RF sample port
- Field replaceable fan assembly
- Weatherproof construction
- 20dB gain adjustment (minimum)

Options

- 1:1, 1:2, N+1 redundant configurations
- Calibrated Input RF sample port

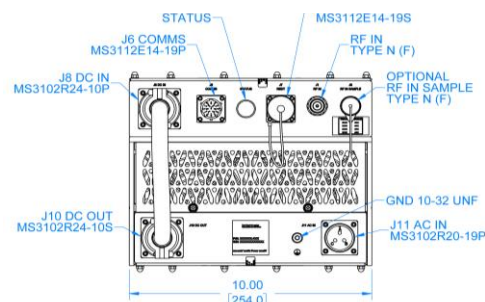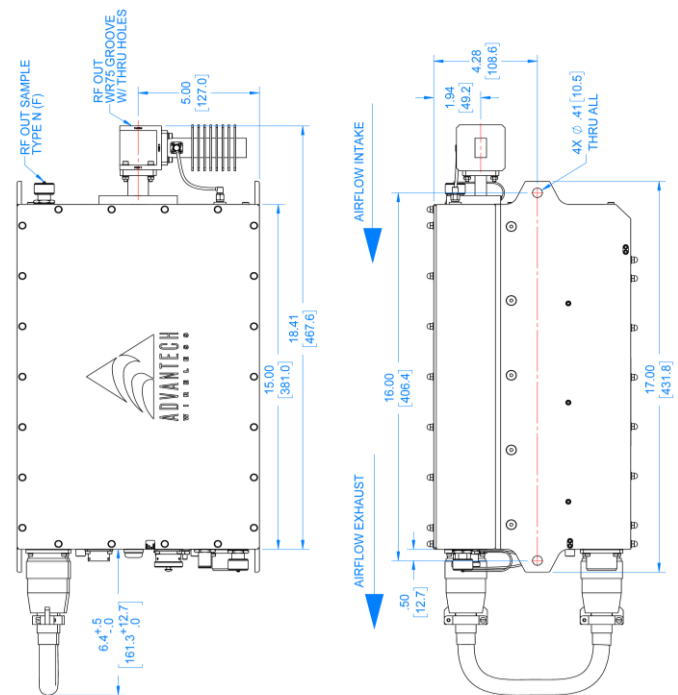

150W/200W/250W/300W Ku-Band GaN SSPA/SSPB

General Specifications				
	150W	200W	250W	300W
SSPA				
Operating Frequency	Standard: 14.0 – 14.5 GHz Extended: 13.75 – 14.5 GHz			
Output Power P _{LINEAR}	+48.7dBm	+50dBm	+51dBm	+51.7 dBm
P _{LINEAR} is the power at which the IMD=-25 dBc for two CW signals 5 MHz apart and the spectral regrowth is <-30 dBc @ 1.0 x symbol rate tested with a single QPSK, 2MS/s SR, 0.35 roll-off				
Gain (with 0dB attenuation)	75 dB			
Gain adjustment range	20 dB in 0.1 dB steps			
Gain flatness over full band	2dB p-p max (SSPA only)			
Gain slope over 40 MHz	± 0.3 dB max (SSPA only)			
Gain variation over temperature	± 1.5 dB max			
Input Impedance and VSWR	50 Ω 1.3:1 (SSPA only)			
Output VSWR	1.3:1			
Signal Related Spurious at P _{LINEAR 1}	-65 dBc max (SSPA only)			
Harmonics	-50 dBc @ P _{LINEAR}			
AM/PM conversion	<1°/dB P _{LINEAR}			
Third order IMD (two tones)	-25 dBc two signal 5 MHz apart at P _{LINEAR}			
Group delay	Ripple 1 nsec p-p max over any 40 MHz band			
SSPB (BUC)				
L-Band input (BUC)	Standard: 950 – 1450 MHz Extended: 950 – 1700 MHz			
Gain flatness over full band	4dB p-p max (SSPB only)			
Gain slope over 40 MHz	± 0.5 dB max (SSPB only)			
Input Impedance and VSWR	50 Ω 1.5:1 (SSPB only)			
Signal Related Spurious at P _{LINEAR 1}	-55 dBc max (SSPB only)			
Local Oscillator freq	Standard: 13.05 GHz Extended: 12.8 GHz			
Internal Reference frequency	Aging/day: ±1 x 10 ⁻⁹ Aging/year: ±10 x 10 ⁻⁸ Stability: ±1 x 10 ⁻⁷ over temp range			
Max Phase Noise	-37 dBc/Hz at 10Hz -67 dBc/Hz at 100Hz	-77 dBc/Hz at 1 kHz -87 dBc/Hz at 10 kHz	-97 dBc/Hz at 100 kHz -107 dBc/Hz at 1 MHz	
External Reference	10 MHz			
Input Power	-5dBm to +5dBm			
Frequency phase noise (max)	-120 dBc/Hz at 10Hz -140 dBc/Hz at 100Hz	-155 dBc/Hz at 1 kHz -160 dBc/Hz at 10 kHz	-165 dBc/Hz at 100 kHz	

Mechanical, Environmental, Power				
Dimensions	L x W x H: 18.4" x 10" x 8.1" (467x254x206 mm)			
Weight	44.5 lbs. (20 kg)			
AC input voltage	90 – 265 VAC (47-63 Hz) 0.95 Power Factor @ 220VAC			
Power consumption at P_{Linear}	850W	1500W	1600W	1700W
Interfaces	Input (RF or L-Band): N type female Output Sample Port: N type female Interface Port: MS3112 type (See outline for details) AC line: MS3102 type (See outline for details) RF output: WR75 Cover with Groove			
Environmental	IP65 compliance Temperature: Operating: -40°C to +55 °C Storage: -55°C to +85 °C Humidity: 100% condensing Altitude: 10,000' AMSL, de-rated by 2 °C/1000' from AMSL			

Note: specifications subject to change without notice.

info@advantechwireless.com

Scan this QR code to locate
The Advantech Wireless
Sales office closest to you:

