

Taurus-Line

600w/800w/1000w X-Band and Low-X band GaN SSPA/BUC


Overview

An ideal solution for both mobile and fixed Communication terminals. It is designed for high efficiency resulting in an optimal compact form factor with high performance and reliability. With the advanced customer interface and HTTP embedded web page, the operator is able to monitor and control the BUC and the System Redundancy.



Features:

- Highest power density in the industry
- Up to 1000W of Saturated RF Output Power
- Up to 400W of RF Linear power
- Designed to comply with the Mil-STD-461 and Mil-STD-810G
- Built-in monitoring of critical parameters such as: RF power detection, mute control, over temperature shutdown, summary alarm
- M&C Interfaces included: RS485, RS232, Ethernet and dry-contacts
- WEB interface and SNMP monitoring
- 1:1 and 1:2 built-in Redundant Ready to eliminate external controller

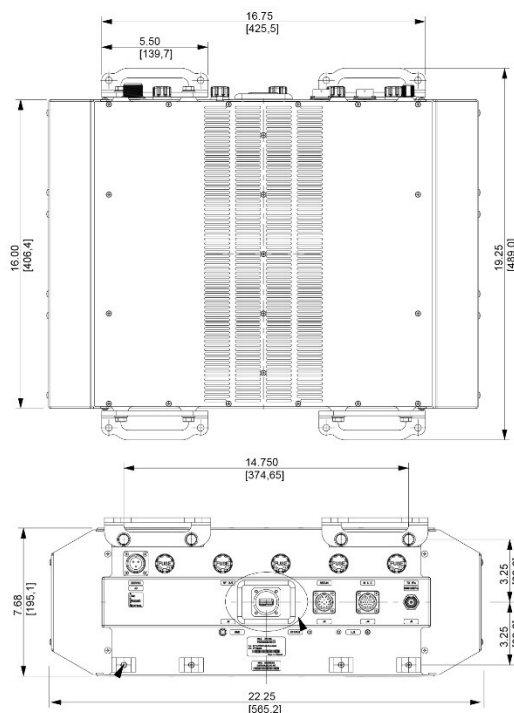

Options:

- Internal/External reference with auto-sensing
- Remote control unit
- External X-Band Tx and Rx band-pass and band-reject filters to comply with X-Band Certification Test

Taurus-Line X-Band and Low-X Band GaN SSPA/BUC

Technical Specifications

X-Band			
Electrical Characteristics	600W	800W	1000W
RF Output at P Sat (Typ, see Note below)*	58 dBm	59 dBm	60 dBm
RF Output at P Lin	54 dBm	55 dBm	56 dBm
Output Frequency Range	Standard X-band: 7.9 – 8.4 GHz/Low X-band: 7.145 to 7.250 GHz		
Input Frequency Range	Standard X-band: 950 – 1450 MHz/ Low X-band: 965-1070 MHz		
Local Oscillator Frequency	Standard X-band: 6.95 GHz/ Low X-band: 6.180 GHz		
Linear Gain	70 dB min.		
Gain Flatness	3dB p-p max.		
Gain Slope	1dB p-p max. over 40MHz		
Gain Stability Over Temperature	± 1.5 dB max.		
User Adjustable Gain	20 dB in 0.5 dB steps		

Spectral Re-growth	-30dBc @PLinear, (at 1 x Symbol Rate, QPSK, 8PSK, alpha=0.35)				
Third order IMD (2 equal tones 5MHz apart)	- 25dBc at PLin (MIL-STD-188-164B)				
10MHz Reference	0dBm ± 5.0 dB - External via IF / (Internal 10MHz reference optional)				
	@ 100 Hz	@ 1 KHz	@ 10 KHz	@ 100 KHz	@ 1 MHz
Ref Phase Noise Requirement		-140 dBc/Hz max	-150 dBc/Hz max	-155 dBc/Hz max	
Local Oscillator Phase Noise	-63 dBc/Hz max	-73 dBc/Hz max	-83 dBc/Hz max	-93 dBc/Hz max	-103 dBc/Hz max
Noise Power Density	-75 dBm/Hz in TX band, -155 dBm/Hz in RX band				
Output Spurious	-60dBc max @PLinear				
Harmonics	-50dBc max @PLinear				
AM/PM	< 2deg/dB at PLin				
VSWR	Input (1:50:1) Output (1:30:1)				

Power consumption

X-Band	600W	800W	1000W
Power consumption (at rated power) AC version	3500W	3750W	4000W
Power requirement	220 VAC		

Interface

Output Interface	Waveguide, CPR 112G (Grooved)		
Input Interface	N-Type Female, 50 Ohms		
Connectors	AC Connector: MS3102R16-10P	M&C: MS3112E14-19P	Redundancy: MS3112E14-15P

Mechanical

Dimensions (L x W x H)	16.0 x 22.3 x 7.7 in / 40.6 x 56.5 x 19.5 cm		
Weight	93 lbs / 42kg		

Environmental

Temperature Range (ambient)	Humidity	Altitude
-40°C to + 55°C (operating)	0 to 100% (condensing)	10,000 ft ASL
-40°C to + 75°C (storage)		

- Operating the unit at Psat long term could cause permanent damage. For maximum reliability and link performance, the units should not be operated at more than 500W continuously.

Ref.: PB-AWT-TMLg-X-25272

NORTH AMERICA

USA
info.usa@advantechwireless.com

CANADA
Info.canada@advantechwireless.com

EUROPE

UNITED KINGDOM
info.uk@advantechwireless.com

SOUTH AMERICA

info.latam@advantechwireless.com

BRAZIL
info.brazil@advantechwireless.com

ASIA

info.asia@advantechwireless.com

INDIA
info.india@advantechwireless.com