
ADVANTECH WIRELESS
A Baylin Technologies Company

250W
X-Band GaN SSPA/SSPB

The new **Genesis-Series** of X-band SSPA/SSPBs from Advantech Wireless Technologies epitomizes the latest in hardware and software technologies, making it the most feature-rich satcom SSPA in the industry. Available in 250W X-band, the Genesis-Series SSPA/SSPB delivers the high-end features discriminating users have come to expect.

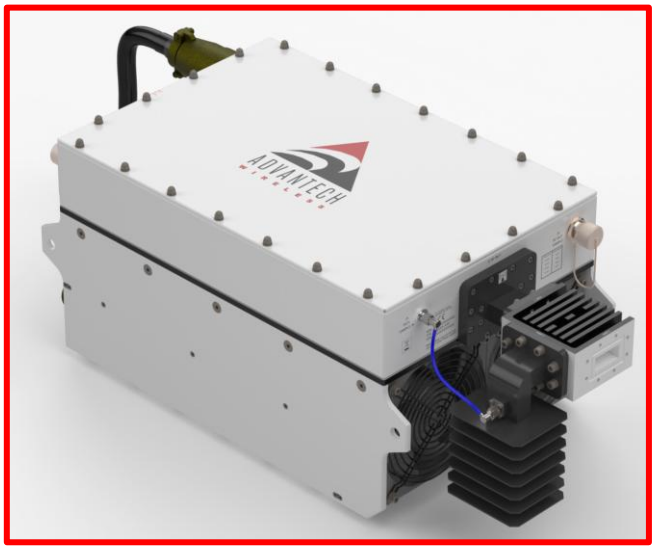


250W X-band GaN SSPB

Features

- 250W in a single package
- SSPA or SSPB option
- Soft-fail ready
- Internal/External reference with autosense
- Field replaceable power supply module
- Redundant ready with no external controller
- Full featured embedded web server
- Secure SNMPv3 interface (10/100 Ethernet)
- Serial Protocol over RS232/RS485/UDP
- Discrete Alarm Interface
- Status LED indicator
- Forward power monitoring
- True RMS power detection
- Calibrated Output RF sample port
- Field replaceable fan assembly
- Weatherproof construction
- 20dB gain adjustment (minimum)

Options

- 1:1, 1:2, N+1 redundant configurations
- Calibrated Input RF sample port

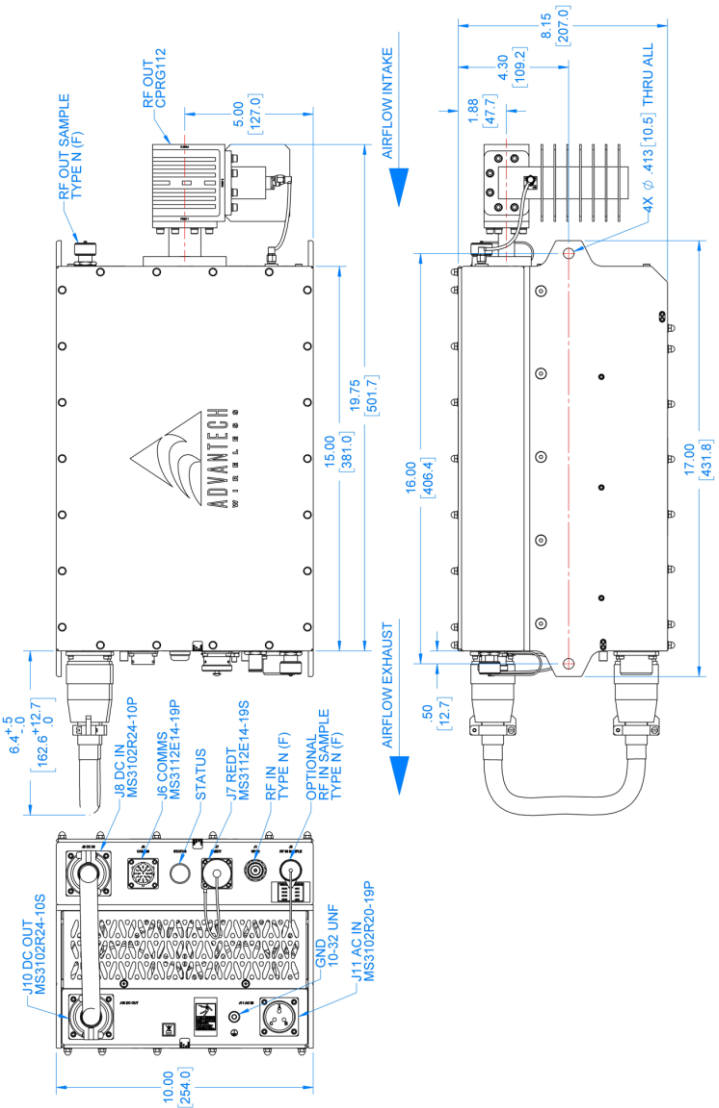

CE (EN 61000-4, EN 61000-3, EN 55011, EN 61010-1)

Copyright 2026
Advantech Wireless Technologies Inc.
All rights reserved.

ADVANTECH WIRELESS
A Baylin Technologies Company

250W
X-Band GaN SSPA/SSPB

General Specifications	
	250W
	SSPA
Operating Frequency	Standard: 7.9 – 8.4 GHz
Output Power P_{LINEAR}	+50.5dBm
	P_{LINEAR} is the power at which the IMD=-25 dBc for two CW signals 5 MHz apart and the spectral regrowth is <-30 dBc @ 1.0 x symbol rate tested with a single QPSK, 2MS/s SR, 0.35 roll-off
Gain (with 0dB attenuation)	75 dB min
Gain adjustment range	20 dB in 0.1 dB steps
Gain flatness over full band	2dB p-p max (SSPA only)
Gain slope over 40 MHz	± 0.3 dB max (SSPA only)
Gain variation over temperature	± 1.5 dB max
Input Impedance and VSWR	50 Ω 1.3:1 (SSPA only)
Output VSWR	1.3:1
Signal Related Spurious at P_{LINEAR}	-60 dBc max (SSPA only)
Harmonics	-50 dBc @ P_{LINEAR}
AM/PM conversion	<1°/dB P_{LINEAR}
Third order IMD (two tones)	-25 dBc two signal 5 MHz apart at P_{LINEAR}
Group delay	Ripple 1 nsec p-p max over any 40 MHz band
	SSPB (BUC)
L-Band input (BUC)	Standard: 950-1450 MHz
Gain flatness over full band	4dB p-p max (SSPB only)
Gain slope over 40 MHz	± 0.5 dB max (SSPB only)
Input Impedance and VSWR	50 Ω 1.5:1 (SSPB only)
Signal Related Spurious at P_{LINEAR}	-55 dBc max (SSPB only)
Local Oscillator freq.	6.95 GHz
Internal Reference frequency	Aging/day: ±1 x 10^{-9} Aging/year: ±10 x 10^{-8} Stability: ±1 x 10^{-7} over temp range
Max Phase Noise	-37 dBc/Hz at 10Hz -77 dBc/Hz at 1 kHz -97 dBc/Hz at 100 kHz -67 dBc/Hz at 100Hz -87 dBc/Hz at 10 kHz -107 dBc/Hz at 1 MHz
External Reference Input Power Frequency phase noise (max)	10 MHz -5dBm to +5dBm -120 dBc/Hz at 10Hz -155 dBc/Hz at 1 kHz -165 dBc/Hz at 100 kHz -140 dBc/Hz at 100Hz -160 dBc/Hz at 10 kHz

Mechanical, Environmental, Power	
Dimensions	L x W x H: 20" x 25" x 8.4" (508 x 635 x 213.36 mm)
Weight	46 lbs. (20.8 kg)
AC input voltage	90 – 265 VAC (47-63 Hz) 0.95 Power Factor @ 220VAC
Power consumption at P_{Linear}	1800W
Interfaces	Input (RF or L-Band): N type female AC line: MS3102 type (See outline for details) Output Sample Port: N type female RF output: CPRG112 Interface Port: MS3112 type (See outline for details)
Environmental	IP65 Compliance Temperature: Operating: -40°C to +55 °C Storage: -55°C to +85 °C Humidity: 100% condensing Altitude: 10,000' AMSL, de-rated by 2 °C/1000> from AMSL

Note: specifications subject to change without notice.

info@advantechwireless.com

Scan this QR code to locate The Advantech Wireless Sales office closest to you:

Copyright 2026
Advantech Wireless Technologies Inc.
All rights reserved.